

N-13 VJR 25段氮氣後避震器

N-13 NITROGEN DAMPING ADJUSTABLE SHOCK ABSORBER FOR VJR 100/110

注意事項

- ①特殊構造及高壓氣體設計，請勿自行拆解否則一律不保固
- ②請勿使用有機溶劑清洗外觀
- ③請確實填寫保固卡並參照保固卡說明內容




NOTICE:

1. DESIGN BY SPECIAL STRUCTURE AND HIGH PRESSURE GAS.
PLEASE DON'T DISASSEMBLE BY YOURSELF; OTHERWISE, NO WARRANTY.
2. PLEASE DON'T USE ORGANIC SOLVENT TO CLEAN SURFACE.
3. PLEASE FILL IN WARRANTY CARD AND ALSO CHECK IT FOR REFERENCE.

彈簧可調距離為12mm
調整12mm後預載為41Kg

SPRING IS ADJUSTABLE FOR 12MM.
AFTER ADJUSTING SPRING 12MM,
PRELOAD IS ABOUT 41KGS.

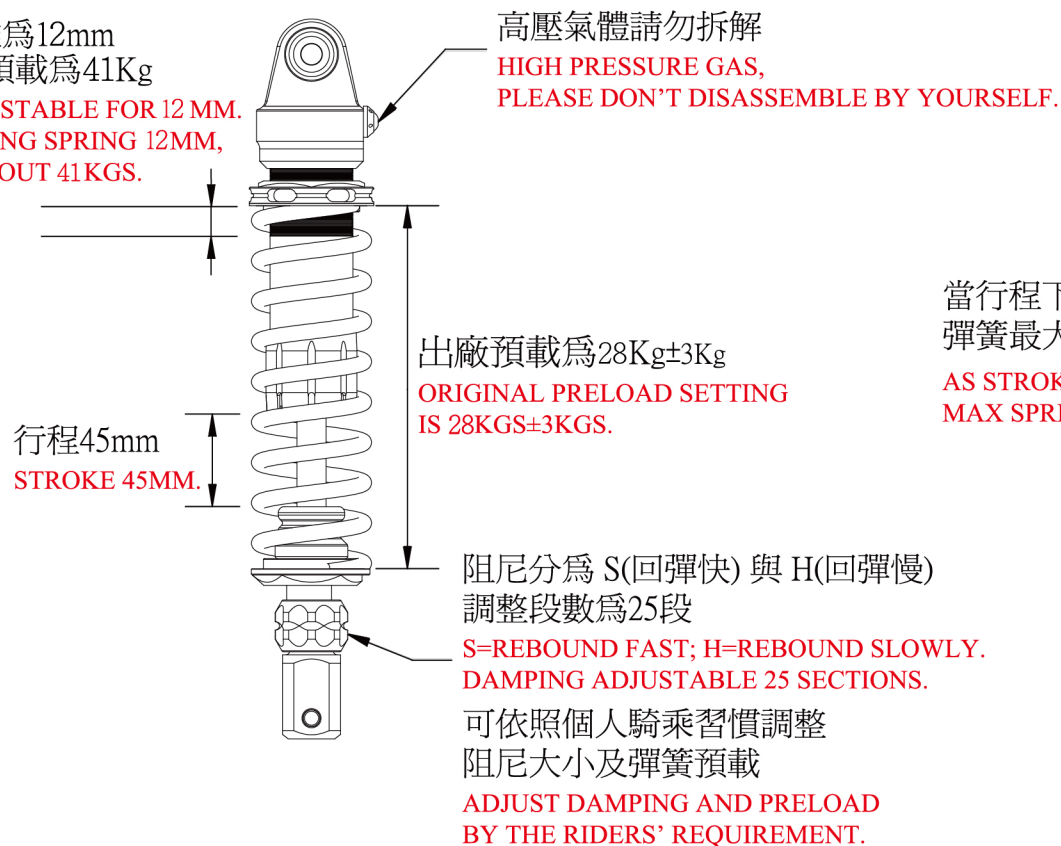

當行程下壓至45mm時
彈簧最大值為 77Kg±3Kg

AS STROKE IS DOWN 45MM,
MAX SPRING IS 77KGS±3KGS.

