

N-13 雷霆 25段氮氣後避震器

N-13 NITROGEN DAMPING ADJUSTABLE SHOCK ABSORBER FOR RACING 125/150


注意事項

- ①特殊構造及高壓氣體設計，請勿自行拆解否則一律不保固
- ②請勿使用有機溶劑清洗外觀
- ③請確實填寫保固卡並參照保固卡說明內容

NOTICE:

1. DESIGN BY SPECIAL STRUCTURE AND HIGH PRESSURE GAS.
PLEASE DON'T DISASSEMBLE BY YOURSELF; OTHERWISE, NO WARRANTY.
2. PLEASE DON'T USE ORGANIC SOLVENT TO CLEAN SURFACE.
3. PLEASE FILL IN WARRANTY CARD AND ALSO CHECK IT FOR REFERENCE.

彈簧可調距離為15mm
調整15mm後預載為47.5Kg
SPRING IS ADJUSTABLE FOR 15MM.
AFTER ADJUSTING SPRING 15MM,
PRELOAD IS ABOUT 47.5KGS.

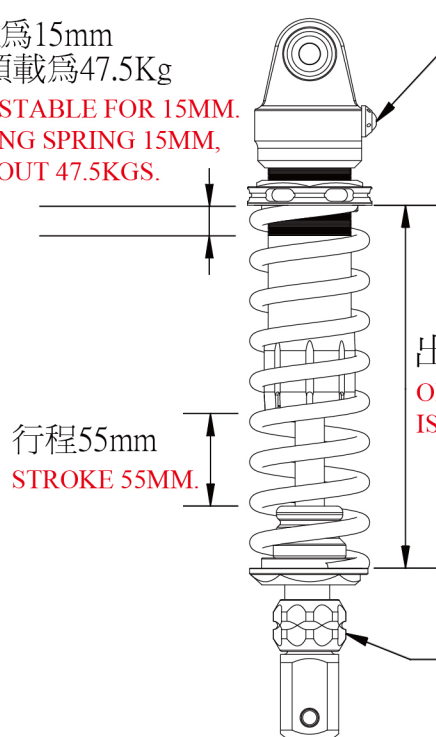

高壓氣體請勿拆解

HIGH PRESSURE GAS,
PLEASE DON'T DISASSEMBLE BY YOURSELF.

出廠預載為28Kg±3Kg
ORIGINAL PRELOAD SETTING
IS 28KGS±3KGS.

阻尼分為 S(回彈快) 與 H(回彈慢)
調整段數為25段

S=REBOUND FAST; H=REBOUND SLOWLY.
DAMPING ADJUSTABLE 25 SECTIONS.

可依照個人騎乘習慣調整
阻尼大小及彈簧預載

ADJUST DAMPING AND PRELOAD
BY THE RIDERS' REQUIREMENT.

當行程下壓至55mm時
彈簧最大值為99.5Kg±3Kg
AS STROKE IS DOWN 55MM,
MAX SPRING IS 99.5KGS±3KGS.

