

N-13 RS 25段氮氣後避震器

N-13 NITROGEN DAMPING ADJUSTABLE SHOCK ABSORBER FOR RS 100

注意事項

- ①特殊構造及高壓氣體設計，請勿自行拆解否則一律不保固
- ②請勿使用有機溶劑清洗外觀
- ③請確實填寫保固卡並參照保固卡說明內容




NOTICE:

1. DESIGN BY SPECIAL STRUCTURE AND HIGH PRESSURE GAS.
PLEASE DON'T DISASSEMBLE BY YOURSELF; OTHERWISE, NO WARRANTY.
2. PLEASE DON'T USE ORGANIC SOLVENT TO CLEAN SURFACE.
3. PLEASE FILL IN WARRANTY CARD AND ALSO CHECK IT FOR REFERENCE.

彈簧可調距離為15mm
調整15mm後預載為63Kg

SPRING IS ADJUSTABLE FOR 15MM.
AFTER ADJUSTING SPRING 15MM,
PRELOAD IS ABOUT 63KGS.

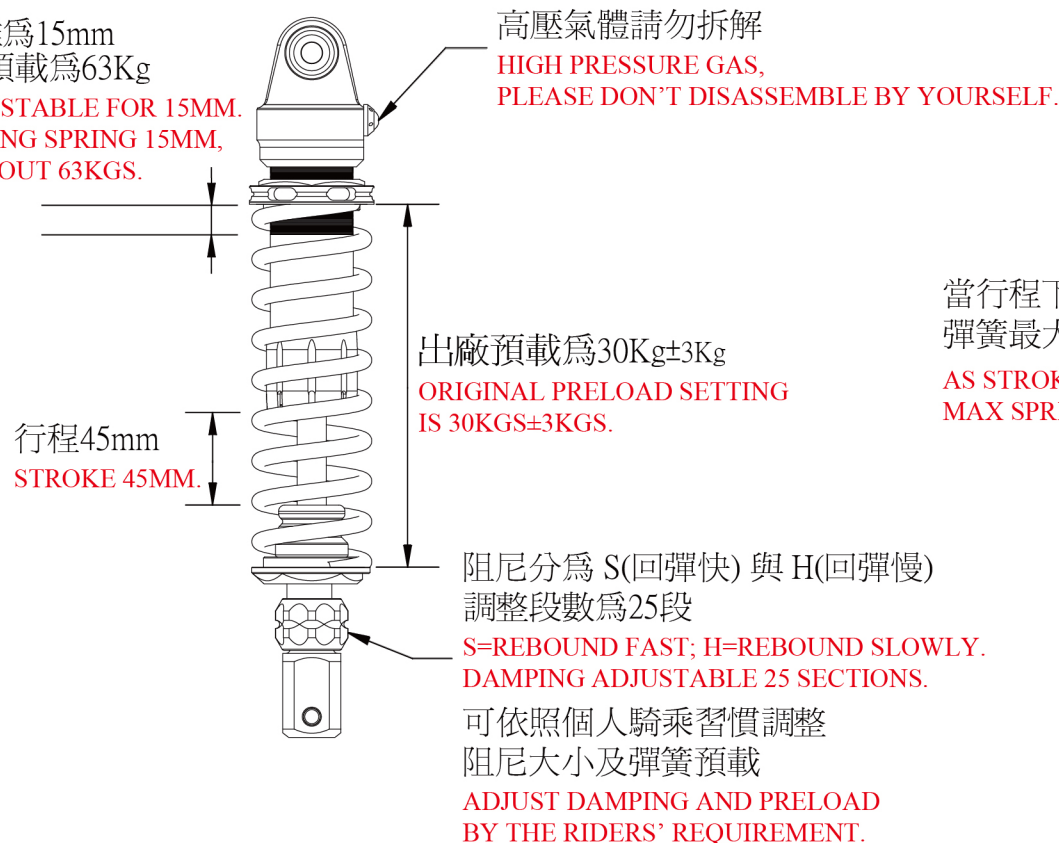

當行程下壓至45mm時
彈簧最大值為129Kg±3Kg

AS STROKE IS DOWN 45MM,
MAX SPRING IS 129KGS±3KGS.

